




Junior Flushmaster Valves for Toilets & Urinals

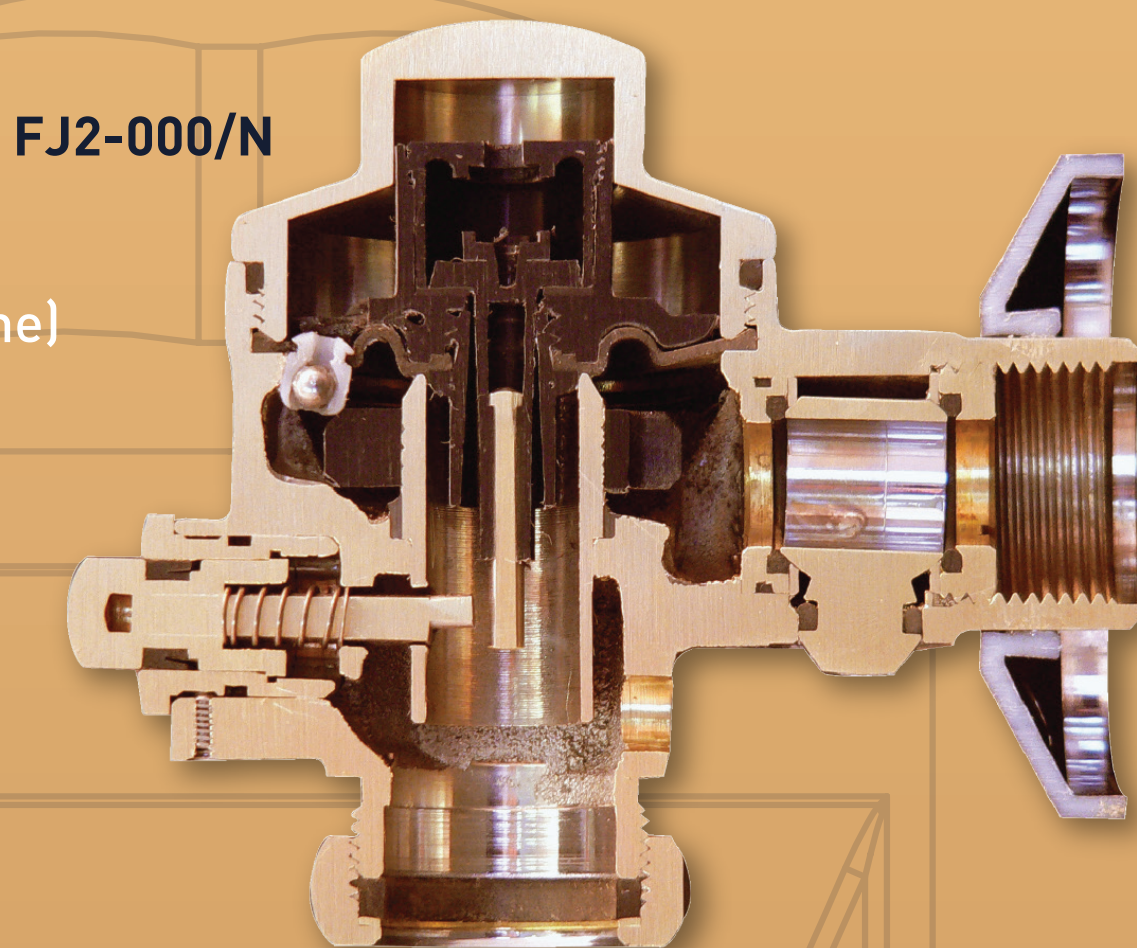

TOILET RANGE LIST



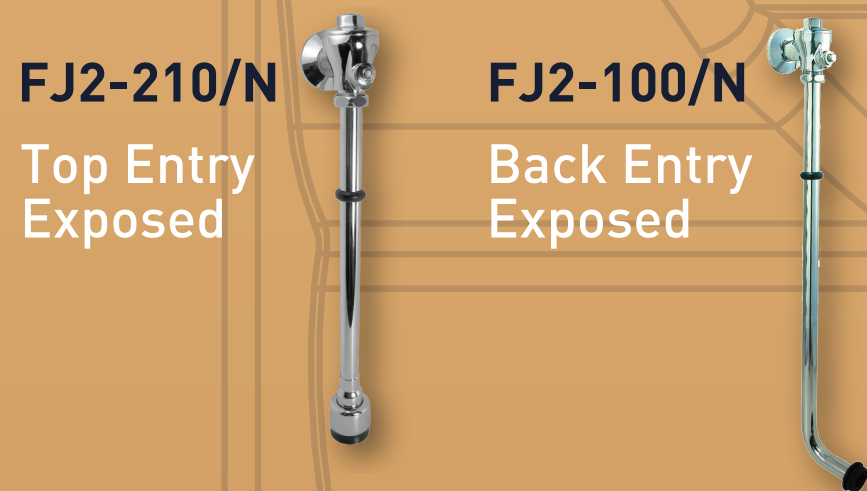


TOILET ACCESSORIES LIST

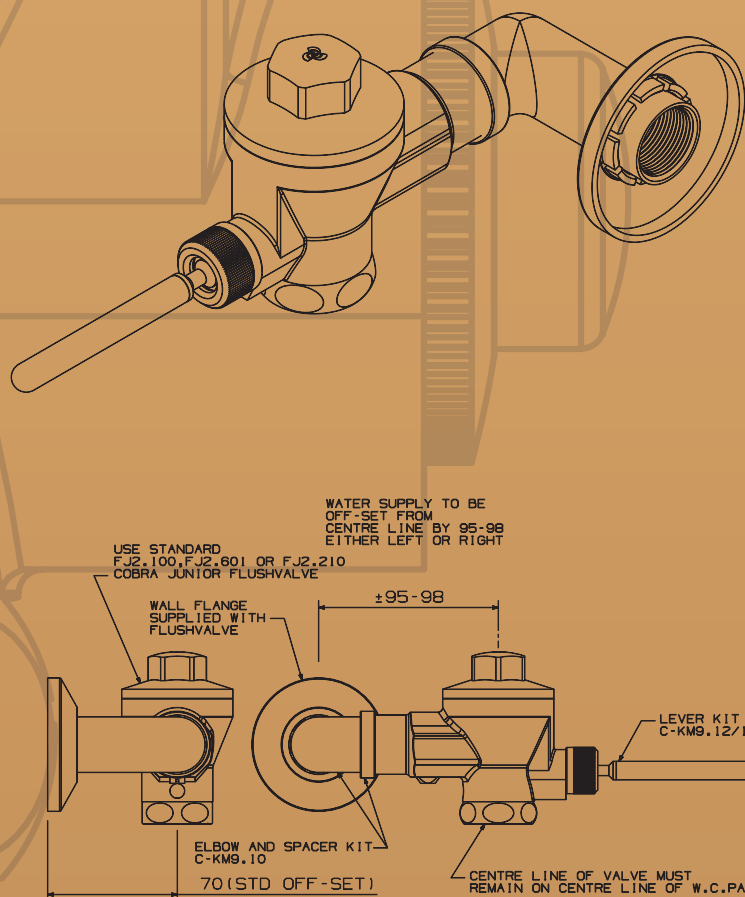


Flush Pipes Toilet		Inlet ømm	Outlet ømm	Length mm		Offset mm
				Vertical	Horizontal	
FJT1-1/N	Bent	25.4	25.4	640	140	-
FJT1-2/N	Straight	25.4	38.2	470	-	-
FJT1-5/N	Bent	25.4	25.4	610	356	-
FMT3-4CP/N	Straight	38.2	38.2	445	-	-

URINAL RANGE LIST

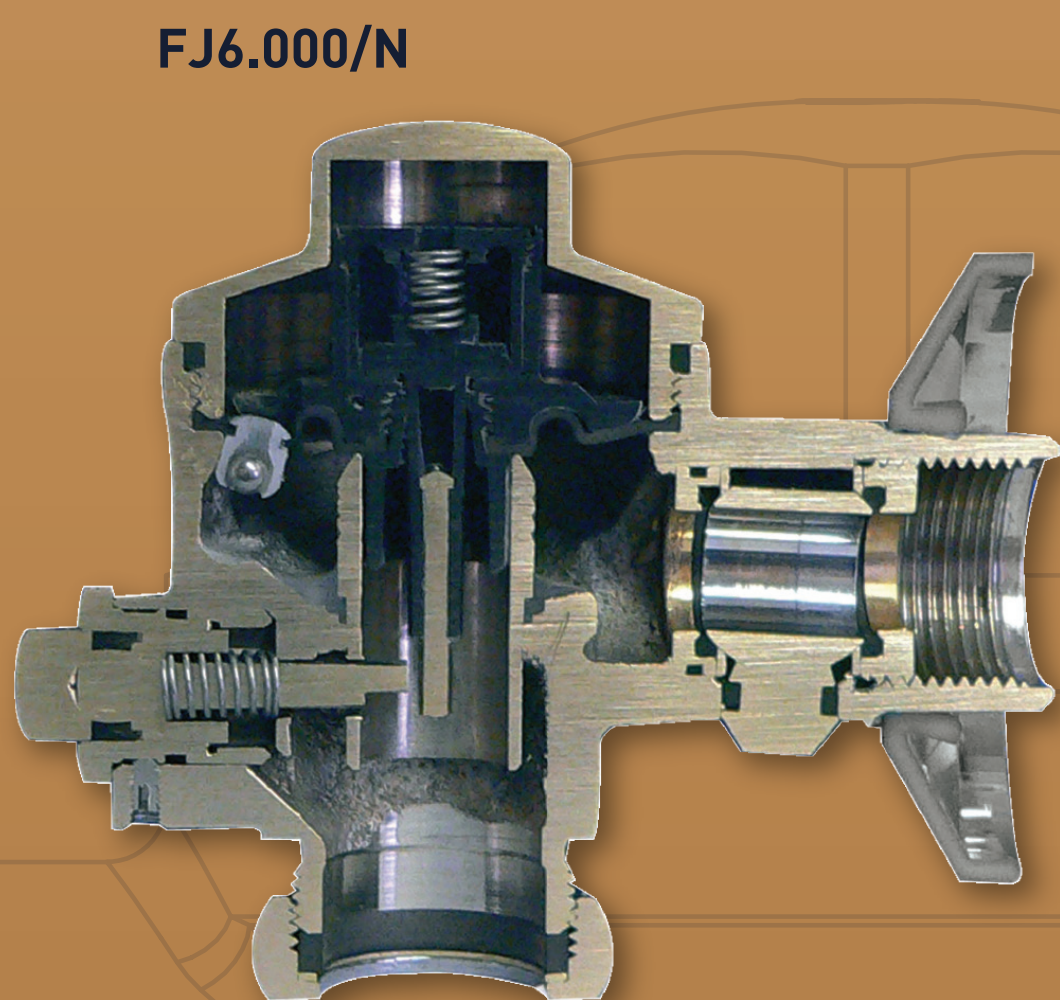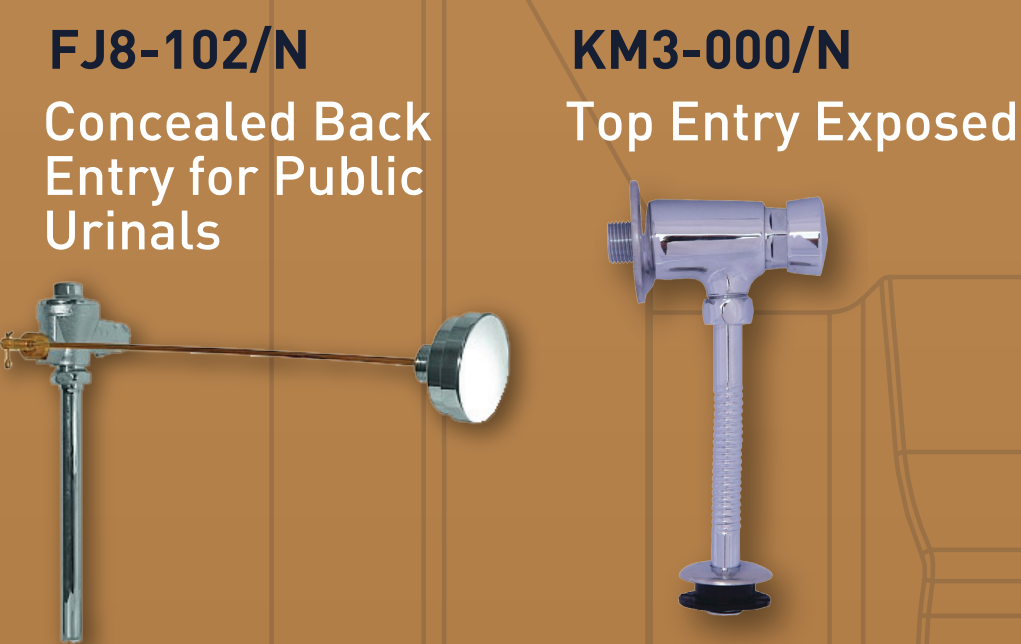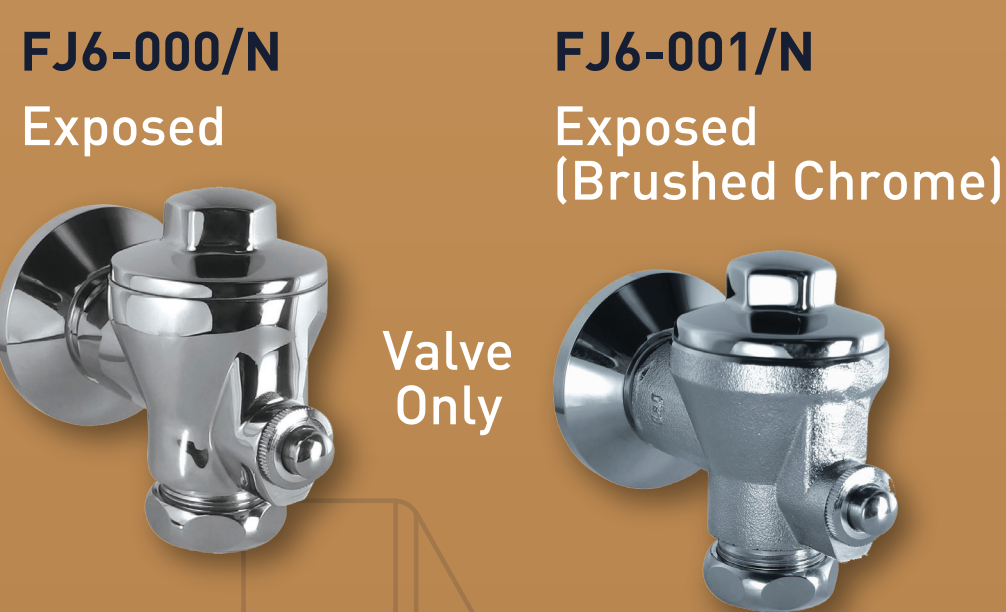

URINAL SPARES LIST

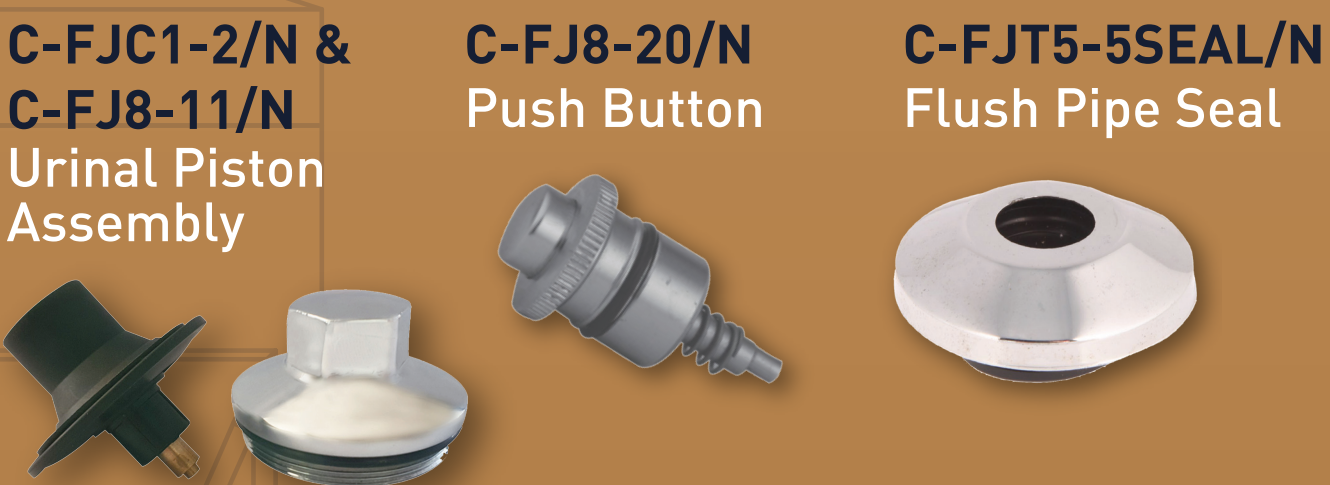

Flush Pipes Urinal		Inlet ømm	Outlet ømm	Length mm	Offset mm	NOTES
FJT5-1/N	Straight	25.4	22	228	-	
FJT5-4/N	Straight	31	-	275	-	Connection 31mm , pipe is 12mm
FJT5-5/N	Off Set	31	15	215	27	Connection 31mm , pipe is 12mm

OPERATING CRITERIA

	JNR BACK ENTRY	JNR TOP ENTRY	JNR URINAL
MINIMUM WORKING PRESSURE:	150kPa	200kPa	30kPa
MAXIMUM WORKING PRESSURE:	600kPa	600kPa	600kPa
PEAK FLOW RATE:	65L/min	65L/min	25L/min
INLET THREAD SIZE:	3/4" BSP	3/4" BSP	3/4" BSP
MINIMUM PIPE SIZE FOR 1*	22mm	22mm	15mm

*Based on copper pipe sizes - there are other variables which will affect this

PART OF **LIXIL**

+27 (0) 861 21 21 21 | customer.helpdesk@lixil.com
WhatsApp: +27 21 137 7644 | www.cobra.co.za