



Standard Flushmaster Valves for Toilets

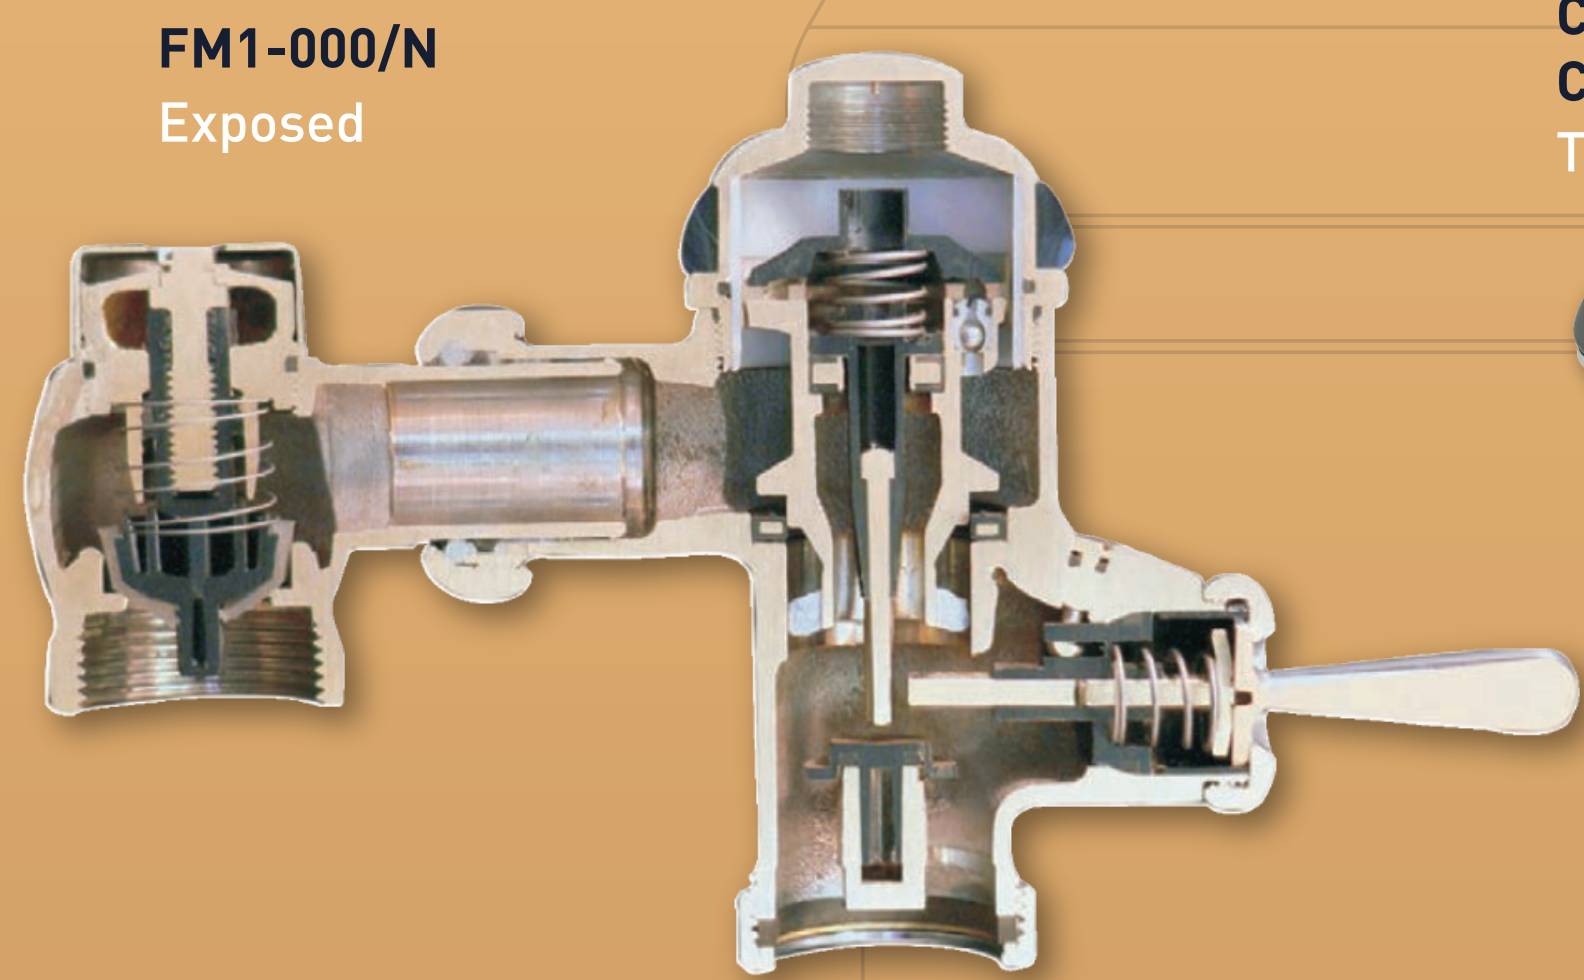

RANGE WITH CONTROL VALVE

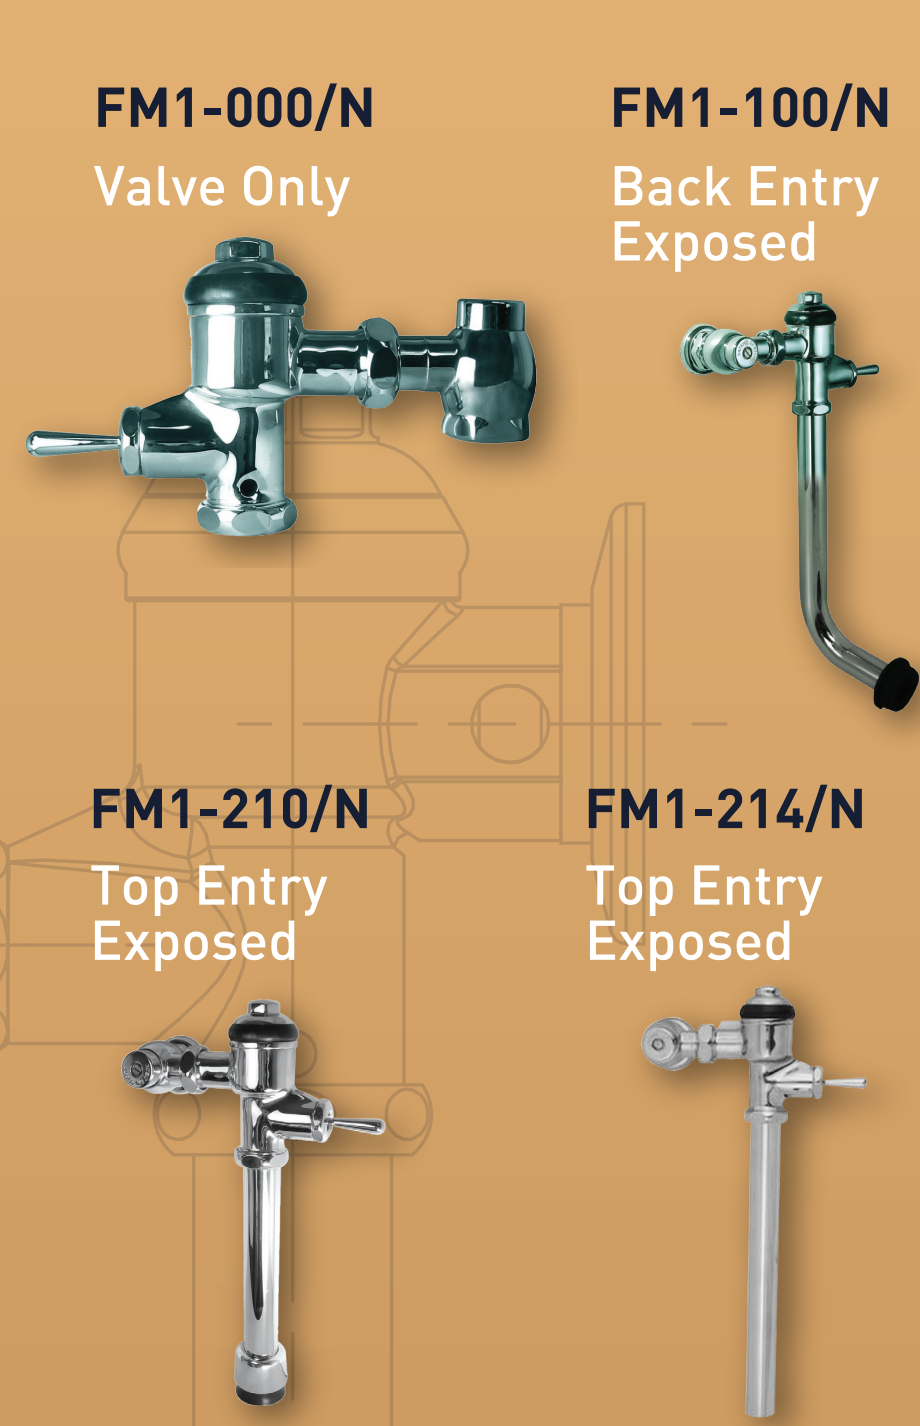

Flush Pipes		ø mm	Length mm	
			Vertical	Horizontal
FMT1-1/N	Bent	38.2	335	140
FMT1-2/N	Straight	38.2	203	-
FMT1-3/N	Bent	38.2	508	280
FMT3-4CP/N	Straight	38.2	445	-


SPARES LIST



ECONO RANGE



ACCESSORIES LIST

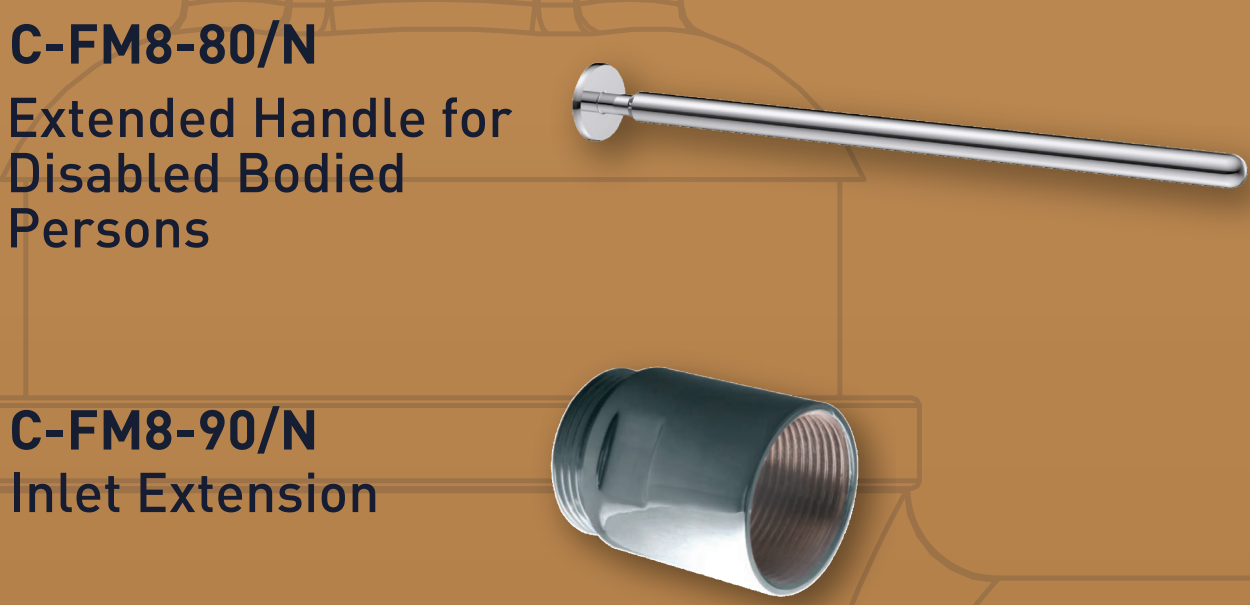

INSTITUTIONAL RANGE



OPERATING CRITERIA	
MINIMUM WORKING PRESSURE:	30kPa
MAXIMUM WORKING PRESSURE:	200kPa
PEAK FLOW RATE:	105L/min
INLET THREAD SIZE:	1 1/4" BSP
MINIMUM PIPE SIZE FOR 1*	35mm
*Based on copper pipe sizes - there are other variables which will affect this	



*All Cobra Standard Flush Valves complies to SANS1240

PART OF **LIXIL**

+27 (0) 861 21 21 21 | customer.helpdesk@lixil.com
WhatsApp: +27 21 137 7644 | www.cobra.co.za