Cobra 1090 20mm

Range: 1090

Description: Ball-O-Stop ball valve, with green rubber-coated zinc plated steel lever,

brass. Includes: 3/4 female connections. Suitable for hot and cold water, air, gasoline and fuel oils. SANS1056-3:2016 Care & Maintenace - Ensure your product does not come into contact with any lubricants during

installation. Chrome plated, matte black and any colour finshes should be wiped with warm soapy water and a soft cloth or sponge. Rinse, then dry and buff with a dry soft cloth. Under no circumstances must any detergents containing hydrochloric acids or abrasives including cream cleansers be used. Do not use abrasive cleaning materials such as scourers. Should your product have an aerator at the water outlet, it should be checked and

cleaned regularly.

Product Code: 1090-20

FBV09020-7FT0140 6002194027997

Barcode: 6002194027997

Product Cobra TeamAssist, Co

Features: Dimensions:

ERP Code:

Cobra TeamAssist, Cobra Genuine, SABS Approved, 2 Year Warranty


Dimensions: (I) 180mm x (w) 140mm x (h) 40mm **Package Weight:** 0.3

CAD3D: Download

COBRA


Product Images





| product-code | ERP code | A | В | С | D |
|--------------|------------------|-------|-------|-----|-------|
| 1090-15 | FBV09015-7FT0140 | 1/2 | 50 | 46 | 85 |
| 1090-20 | FBV09020-7FT0140 | 3/4 | 57 | 58 | 102.5 |
| 1090-25 | FBV09025-7FT0140 | 1 | 68 | 61 | 115 |
| 1090-32 | FBV09032-7FT0140 | 1 1/4 | 77 | 73 | 132 |
| 1090-40 | FBV09040-7FT0140 | 1 1/2 | 89. 5 | 86 | 153 |
| 1090-50 | FBV09050-7FT0140 | 2 | 109 | 94 | 153 |
| 1090-80 | FBV09080-7FT0140 | 3 | 153 | 130 | 243 |
| 1090-100 | FBV09010-7FT0140 | 4 | 179 | 139 | 243 |
| | | | | | |

Flow Chart

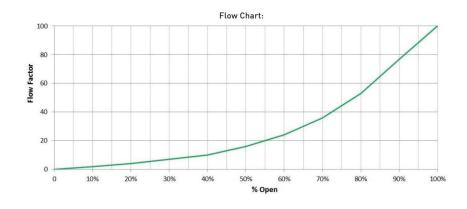

MOT









Cobra TeamAssist

Cobra Genuine

2 Year Warranty

SABS Approved