

# Cobra 1090 32mm



**Range:** 1090

**Description:** Ball-O-Stop ball valve, with green rubber-coated zinc plated steel lever, brass. Includes: 1&1/4 inch female connections. Suitable for hot and cold water, air, gasoline and fuel oils. SANS1056-3:2016 Care & Maintenance - Ensure your product does not come into contact with any lubricants during installation. Chrome plated, matte black and any colour finishes should be wiped with warm soapy water and a soft cloth or sponge. Rinse, then dry and buff with a dry soft cloth. Under no circumstances must any detergents containing hydrochloric acids or abrasives including cream cleansers be used. Do not use abrasive cleaning materials such as scourers. Should your product have an aerator at the water outlet, it should be checked and cleaned regularly.

**Product Code:** 1090-32

**ERP Code:** FBV09032-7FT0140

**Barcode:** 6002194028017


**Product Features:** Cobra TeamAssist, Cobra Genuine, SABS Approved, 2 Year Warranty

**Dimensions:** (l) 210mm x (w) 70mm x (h) 50mm

**Package Weight:** 0.68


**CAD3D:** [Download](#)

## Product Images

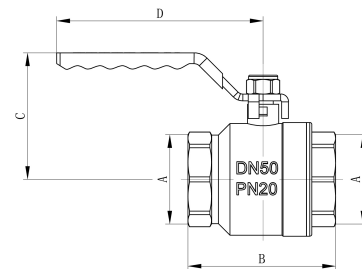

| product-code | ERP code         | A     | B    | C   | D     |
|--------------|------------------|-------|------|-----|-------|
| 1090-15      | FBV09015-7FT0140 | 1/2   | 50   | 46  | 85    |
| 1090-20      | FBV09020-7FT0140 | 3/4   | 57   | 58  | 102.5 |
| 1090-25      | FBV09025-7FT0140 | 1     | 68   | 61  | 115   |
| 1090-32      | FBV09032-7FT0140 | 1 1/4 | 77   | 73  | 132   |
| 1090-40      | FBV09040-7FT0140 | 1 1/2 | 89.5 | 86  | 153   |
| 1090-50      | FBV09050-7FT0140 | 2     | 109  | 94  | 153   |
| 1090-80      | FBV09080-7FT0140 | 3     | 153  | 130 | 243   |
| 1090-100     | FBV09010-7FT0140 | 4     | 179  | 139 | 243   |

## Flow Chart

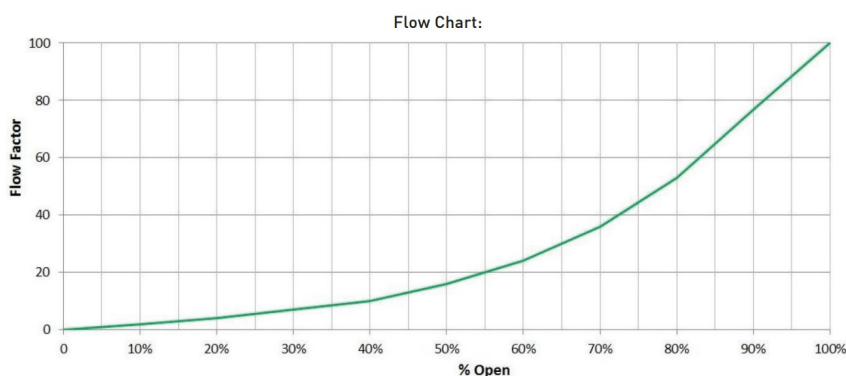

MOT



Cobra TeamAssist



Cobra Genuine



2 Year Warranty



SABS Approved