


# Cobra Cobra Float Valve



**Range:** Cobra  
**Description:** Float valve with side inlet, rough brass. Includes: high-pressure MOH pattern, 319mm long arm, piston, backnut, replaceable 4.5mm I.D. nylon seat, 32mm long inlet, and 3/4 male inlet.  
**Product Code:** 700-20/N  
**ERP Code:** FFLOHI20-7FT01  
**Barcode:** 6002194052111  
**Product Features:** SABS Approved, 2 Year Warranty  
**Dimensions:** (l) 480mm x (w) 90mm x (h) 50mm  
**Package Weight:** 0.65  
**CAD3D:** [Download](#)

## Product Images

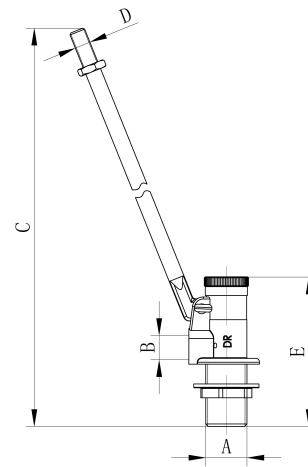

product-code	ERP code	A	B	C	D	E
700-15/N	FFLOHI15-7FT01	1/2	9/16-26PTI	345.5	M8	78.5
700-20/N	FFLOHI20-7FT01	3/4	1/2	421	M8	104
700-25/N	FFLOHI25-7FT01	1	1.062x26PTI	515	M10	119
700-32/N	FFLOHI32-7FT01	1 1/4	1	530	M12	162
700-40/N	FFLOHI40-7FT01	1 1/2	1	562	M12	162
700-50/N	FFLOHI50-7FT01	2	1	649	M12	162

## Flow Chart

COBRA FLOAT VALVES									
Valve Specification									
Sales Item	Size	Orifice Ø mm	Float Ø mm	Closing Pressure (kPa)	Arm Length	Total Length	Min. tank depth from inlet centre	SABS Specified minimum flow at:	Flow Rate, l/min.
				112V / 34V			w/o float	w/float	
1212	715	15 mm	2.7 <sup>+0.1</sup>	110	3800	4900	286	314	436
		20 mm	4.5 <sup>+0.15</sup>	125	2400	3100	319	379.4	516.4
		25 mm	10	205	2700	3900	400	467.5	672.5
		32 mm	11.1 <sup>+0.1</sup>	205	1900	2300	400	488.5	693.5
		40 mm	14.3 <sup>+0.1</sup>	254	2300	3400	430	518.5	772.5
		50 mm	16 <sup>+0.1</sup>	205	1100	1600	520	608.5	813.5
		15 mm	4.5 <sup>+0.1</sup>	110	2200	3200	286	314	436
		Special							5
		15 mm	3.2 <sup>+0.1</sup>	110	3000	4000	286	314	436
		20 mm	10	125	700	900	319	381.6	518.6
		25 mm	13	205	2100	2800	400	467.5	672.5
		32 mm	22.2 <sup>+0.1</sup>	205	450	850	400	488.5	693.5
		40 mm	27 <sup>+0.1</sup>	205	350	550	430	518.5	723.5
		50 mm	27 <sup>+0.1</sup>	245	900	1500	430	518.5	772.5
1212	720	15 mm	2.5 <sup>+0.1</sup>	110	3600	4600	286	336.6	468.6
		20 mm	6.35 <sup>+0.4</sup>	125	1000	1800	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1800	2600	286	336.6	483.6
		20 mm	10	125	600	1000	319	412.5	549.5
1212	720	15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm	4.5 <sup>+0.15</sup>	110	1200	1800	286	318	5
		20 mm	10	125	600	1000	319	412.5	549.5
		15 mm							