
Cobra Flush Master Toilet Flush Valve

Range:	Flush Master
Description:	Exposed top entry. Non-hold open feature. With wall flange, integral vacuum breaker, and butterfly control inlet. Including pan connector. With straight flushpipe and compression pan connector. 1 1/4BSP female iron connection end. Recommended optimum design pressures: inlet flow pressure 30 - 300kPa for top entry WC pans: Maximum system pressure 600kPa.
Product Code:	FM2-210/N
ERP Code:	FFUUSPFM-0GT01
Barcode:	6002194033110
Product Features:	Cobra PureShine, Cobra EcoMind, Cobra TeamAssist, Cobra Genuine, Cobra LowPressure, DZR Brass, 2 Year Warranty
Dimensions:	(l) 480mm x (w) 250mm x (h) 80mm
Package Weight:	2

Product Images



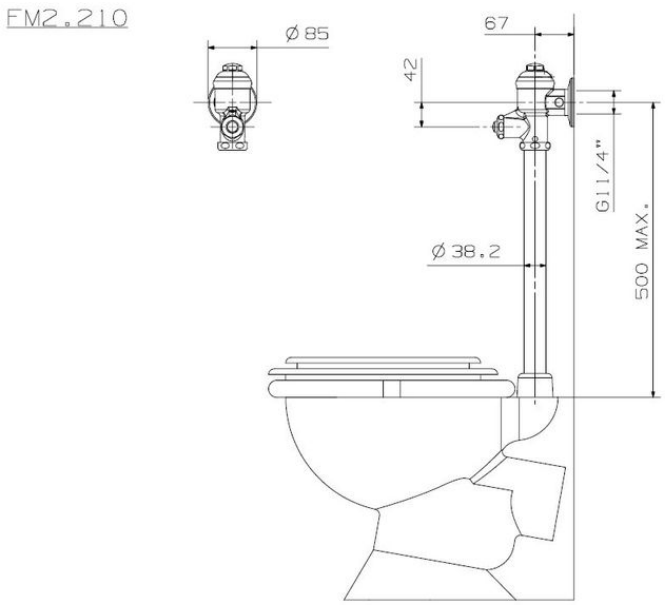

MOT

Cobra PureShine | Cobra EcoMind | Cobra TeamAssist | Cobra Genuine | Cobra LowPressure | 2 Year Warranty | DZR Brass