


# Cobra Flush Junior Toilet Flush Valve



<b>Range:</b>	Flush Junior
<b>Description:</b>	Exposed. Non-hold open feature. With wall flange, integral vacuum breaker, and 'Ball O Stop' control inlet. 3/4BSP female iron connection end. Recommended optimum design pressures: inlet flow pressure 150 - 500kPa for back entry WC pans: inlet flow pressure 200 - 500kPa for top entry WC pans: Maximum system pressure 600kPa. Care & Maintenance - Ensure your product does not come into contact with any lubricants during installation. Chrome plated, matte black and any colour finishes should be wiped with warm soapy water and a soft cloth or sponge. Rinse, then dry and buff with a dry soft cloth. Under no circumstances must any detergents containing hydrochloric acids or abrasives including cream cleansers be used. Do not use abrasive cleaning materials such as scourers. Should your product have an aerator at the water outlet, it should be checked and cleaned regularly.
<b>Product Code:</b>	FJ2-000/N
<b>ERP Code:</b>	FFUUSTFJ-0GT01
<b>Barcode:</b>	6002194018582
<b>Product Features:</b>	Cobra PureShine, Cobra EcoMind, Cobra TeamAssist, Cobra Genuine, DZR Brass, 2 Year Warranty, JaswicApproved
<b>Dimensions:</b>	(l) 150mm x (w) 120mm x (h) 70mm
<b>Package Weight:</b>	0.96

## Product Images

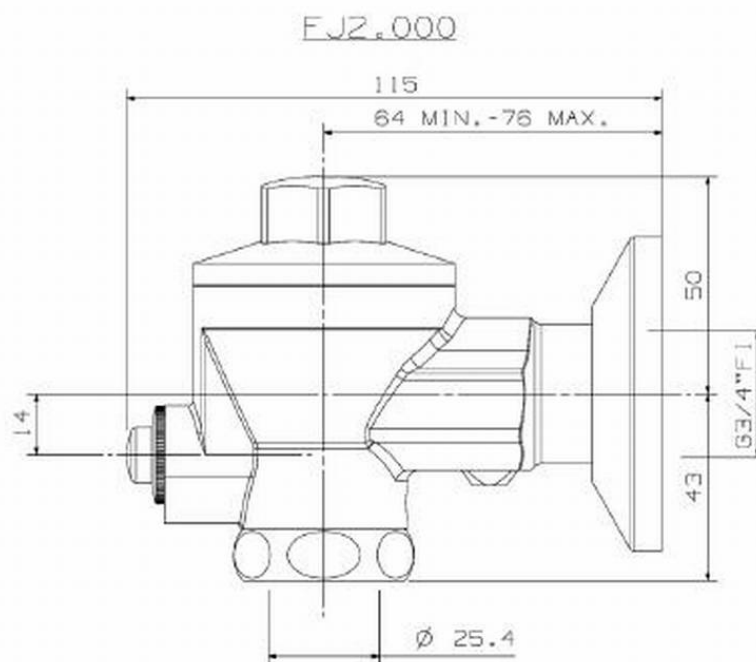

## MOT



Cobra PureShine



Cobra EcoMind



Cobra TeamAssist



Cobra Genuine



2 Year Warranty



DZR Brass



JaswicApproved