


Cobra Flush Junior Urinal Flush Valve



Range:	Flush Junior
Description:	Exposed. Non-hold open feature. With 'Ball O Stop' control inlet, wall flange, additional screw and piston for large bowl and stall urinals. 3/4BSP female iron connection end. Recommended optimum design pressures: inlet flow pressure 30 - 500kPa: Maximum system pressure 600kPa. Care & Maintenance - Ensure your product does not come into contact with any lubricants during installation. Chrome plated, matte black and any colour finishes should be wiped with warm soapy water and a soft cloth or sponge. Rinse, then dry and buff with a dry soft cloth. Under no circumstances must any detergents containing hydrochloric acids or abrasives including cream cleansers be used. Do not use abrasive cleaning materials such as scourers. Should your product have an aerator at the water outlet, it should be checked and cleaned regularly.
Product Code:	FJ6-000/N
ERP Code:	FFUUSUFJ-0GT01
Barcode:	6002194022923
Product Features:	Cobra PureShine, Cobra EcoMind, Cobra TeamAssist, Cobra Genuine, Cobra LowPressure, DZR Brass, 2 Year Warranty, JaswicApproved
Dimensions:	(l) 150mm x (w) 120mm x (h) 70mm
Package Weight:	0.96

Product Images

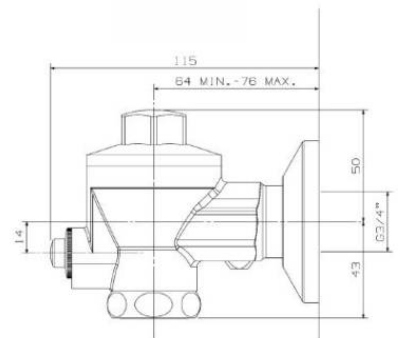

MOT



Cobra PureShine



Cobra EcoMind



Cobra TeamAssist



Cobra Genuine



Cobra LowPressure



2 Year Warranty



DZR Brass



JaswicApproved