


# Cobra Cobra Stop Tap Metering




|                          |  |
|--------------------------|--|
| <b>Range:</b>            | Cobra  |
| <b>Description:</b>      | Non hold open, self closing. With stainless steel wall flange. 1/2BSP male iron connection ends. Flow cycle 1-20 seconds. Care & Maintenance - Ensure your product does not come into contact with any lubricants during installation. Chrome plated, matte black and any colour finishes should be wiped with warm soapy water and a soft cloth or sponge. Rinse, then dry and buff with a dry soft cloth. Under no circumstances must any detergents containing hydrochloric acids or abrasives including cream cleansers be used. Do not use abrasive cleaning materials such as scourers. Should your product have an aerator at the water outlet, it should be checked and cleaned regularly. |
| <b>Product Code:</b>     | KM2-301/N  |
| <b>ERP Code:</b>         | FSTAX1MT-0GT01   |
| <b>Barcode:</b>          | 6002194032670  |
| <b>Product Features:</b> | Cobra EcoMind, Cobra TeamAssist, Cobra Genuine, DZR Brass, 2 Year Warranty   |
| <b>Dimensions:</b>       | (l) 130mm x (w) 100mm x (h) 60mm   |
| <b>Package Weight:</b>   | 0.8  |
| <b>CAD3D:</b>            | <a href="#">Download</a>   |

## Product Images

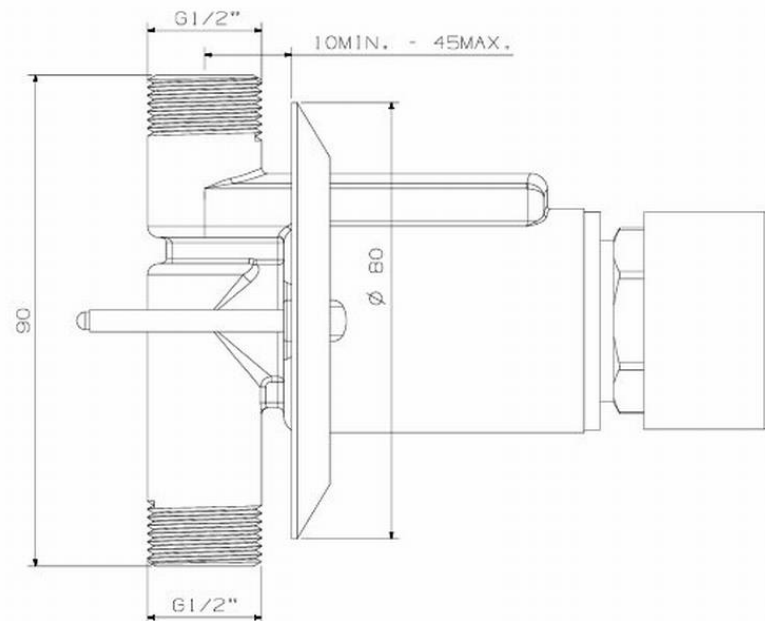

## Flow Chart

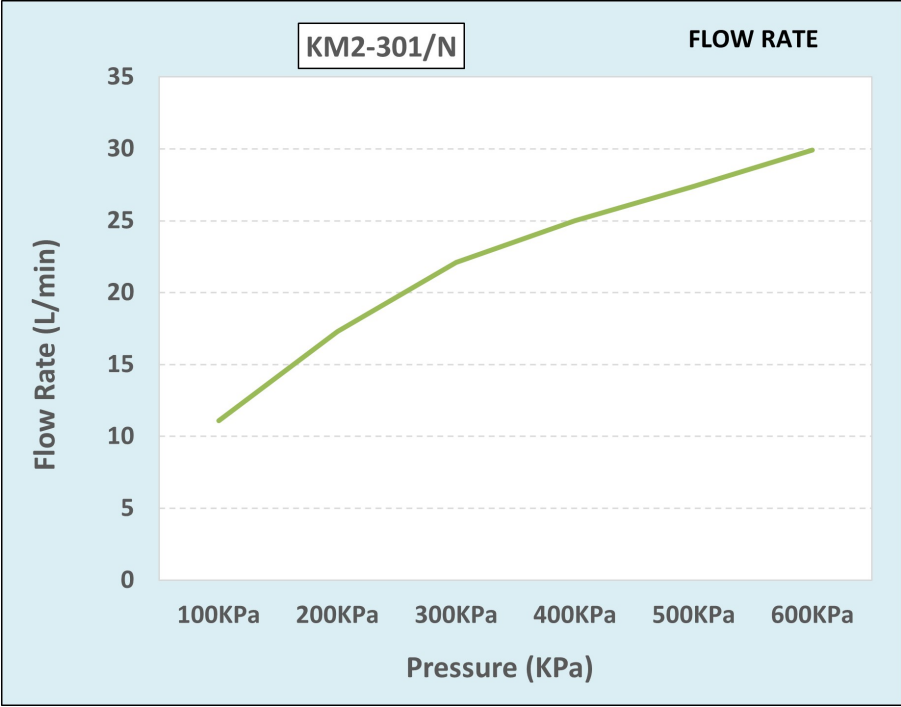

MOT



Cobra Genuine



Cobra TeamAssist



Cobra EcoMind



DZR Brass



2 Year Warranty