

Cobra Kwikflo3 PCV Inline Polymer 400kPa



Range: Kwikflo3

Description: Inline design for high flow rate ensuring optimal terminal fitting performance. DZR brass ball used for enhanced shut-off strength under full flow pressure. 360 revolving isolating valve and expansion outlet for flexibility and ease of installation. Body made of premium Nylon 66 polymer material including the isolating lever, temperature rating 60-100 degrees, UV stable body. SANS 198 Compliant

Product Code: PA9-332

ERP Code: 1125579990

Barcode: 6002194159841


Product 2 Year Warranty, JaswicApproved

Features:

Dimensions: (l) 188mm x (w) 188mm x (h) 60mm

Package Weight: 0.745

Product Images

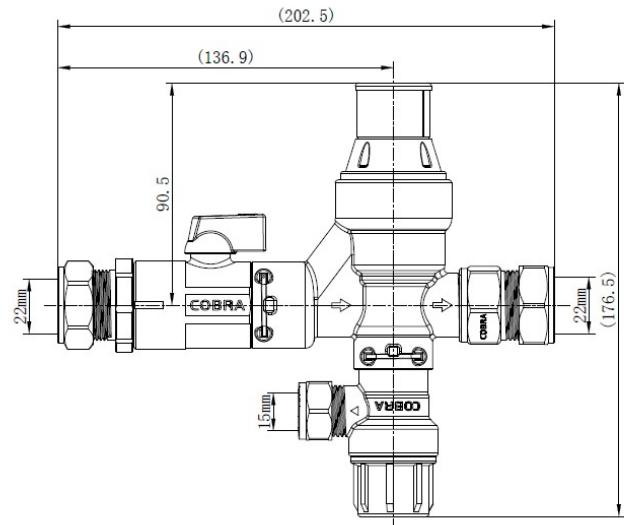

MOT



2 Year Warranty



JaswicApproved