
# Grohe Grohtherm SmartControl Thermostat for concealed installation with 2 valves


| | |
|---|---|
| **Range:** | Grohtherm SmartControl |
| **Description:** | The GROHE Grohtherm SmartControl concealed thermostat with 2 valves – shower or bathe in style with effortless control at your fingertips - set for final installation for, GROHE Rapido SmartBox 35 600/35 604, metal wall escutcheon with GROHE FastFixation (covered escutcheon, and shaft sealing, covered fixing), retroactively 6° adjustable, GROHE Long-Life finish, GROHE SmartControl push for ON-OFF, turn for volume adjustment from GROHE Water Saving to Full Flow, exchangeable symbols, GROHE TurboStat compact cartridge with wax thermoelement, GROHE ProGrip with knurl structure, GROHE SafeStop safety button at 38°C, (calibration required), GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included, built-in non return valve , and dirt strainers, multiple outlets can be run simultaneously, without roughing-in-set, flow performance: , outlet B = 24 l/min , outlet C = 26 l/min, outlet B+C = 29 l/min |
| **Product Code:** | G-29119000 |
| **ERP Code:** | G-29119000 |
| **Barcode:** | 4005176412257 |
| **Product Features:** | 20 Year Warranty |
| **Dimensions:** | (l) 200mm x (w) 180mm x (h) 243mm |
| **Package Weight:** | 1 |
| **CAD3D:** | Download |

Product Images




Flow Chart

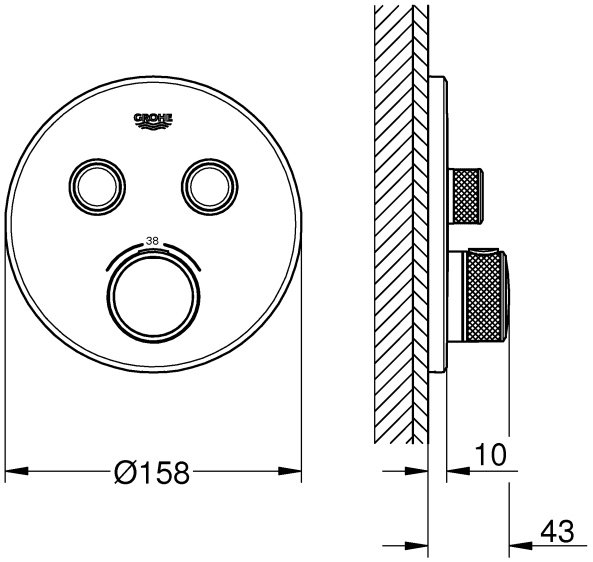

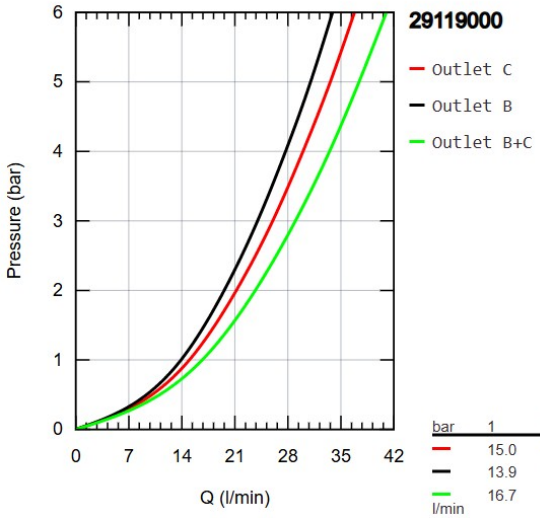
| bar | 1 | 2 | 3 | 4 | 5 | 6 |
|---|---|---|---|---|---|---|
| — | 15.0 | 21.2 | 26.0 | 30.0 | 33.6 | 36.8 |
| — | 13.9 | 19.6 | 24.0 | 27.7 | 31.0 | 33.9 |
| — | 16.7 | 23.7 | 29.0 | 33.5 | 37.4 | 41.0 |
| l/min | | | | | | |

MOT

20 Year Warranty