
Grohe Grohtherm SmartControl SmartControlThermostat for concealed installation with 2 valves


Range:	Grohtherm SmartControl
Description:	Bring ease and precision into your bath and shower with the Grohtherm SmartControl thermostat - set for final installation for, GROHE Rapido SmartBox 35 600/35 604, metal wall escutcheon with GROHE FastFixation (covered escutcheon, and shaft sealing, covered fixing), retroactively 6° adjustable, GROHE Long-Life finish, GROHE SmartControl push for ON-OFF, turn for volume adjustment from GROHE Water Saving to Full Flow, exchangeable symbols, GROHE TurboStat compact cartridge with wax thermoelement, GROHE SafeStop safety button at 38°C, (calibration required), GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included, built-in non return valve , and dirt strainers, multiple outlets can be run simultaneously, without roughing-in-set, flow performance: , outlet B = 24 l/min , outlet C = 26 l/min, outlet B+C = 29 l/min
Product Code:	G-29124AL0
ERP Code:	G-29124AL0
Barcode:	4005176558146
Product Features:	GROHE TurboStat, 20 Year Warranty, GROHE Long-Life finish, GROHE Water Saving, 10 Years on coating
Dimensions:	(l) 200mm x (w) 180mm x (h) 243mm
Package Weight:	1
CAD3D:	Download

Product Images



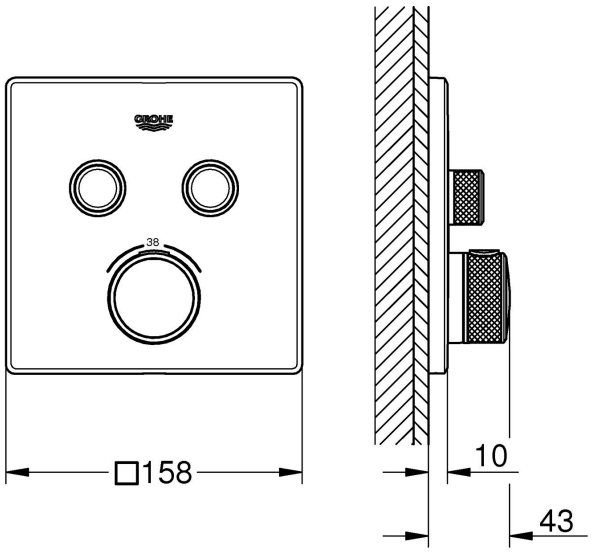

Flow Chart

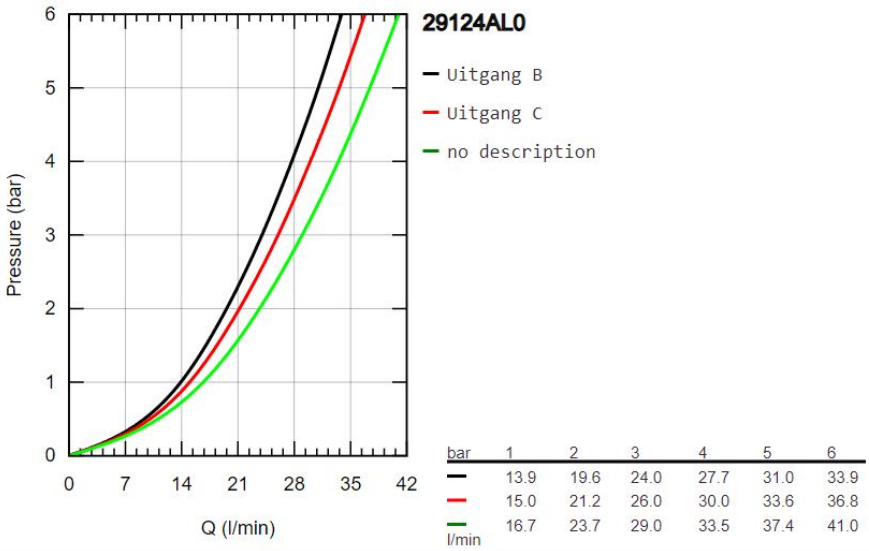

bar	1	2	3	4	5	6
—	13.9	19.6	24.0	27.7	31.0	33.9
—	15.0	21.2	26.0	30.0	33.6	36.8
—	16.7	23.7	29.0	33.5	37.4	41.0
l/min						

MOT

GROHE TurboStat

GROHE Long-Life finish

GROHE Water Saving

20 Year Warranty