



Grohe Grohtherm SmartControl Thermostat for concealed installation with 3 valves

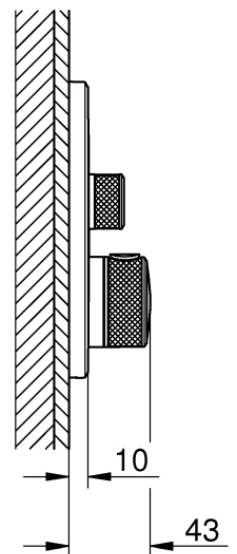


| | |
|--------------------------|---|
| Range: | Grohtherm SmartControl |
| Description: | set for final installation for GROHE Rapido SmartBox (35 600/35 604) metal wall escutcheon with GROHE FastFixation (covered escutcheon and shaft sealing, covered fixing), retroactively 6deg adjustable GROHE Long-Life chrome finish GROHE SmartControl push for ON-OFF, turn for volume adjustment from Water-Saving to Full Flow, exchangeable symbols GROHE TurboStat compact cartridge with wax thermoelement GROHE ProGrip with knurl structure GROHE SafeStop safety button at 38degC GROHE SafeStop Plus optional temperature limiter at 43degC or 46degC included built-in non return valves and dirt strainers multiple outlets can be run simultaneously without roughing-in set flow performance: outlet A = 23 l/min outlet B = 27 l/min outlet C = 23 l/min outlet A + B = 33 l/min outlet A + B + C = 36 l/min Recommended, to be used in conjunction with a main supply hot water loop |
| Product Code: | G-29126000 |
| ERP Code: | G-29126000 |
| Barcode: | 4005176413322 |
| Product Features: | GROHE TurboStat, 20 Year Warranty, GROHE Long-Life finish |
| Dimensions: | (l) 200mm x (w) 180mm x (h) 243mm |
| Package Weight: | 1.92 |
| CAD3D: | Download |

Product Images

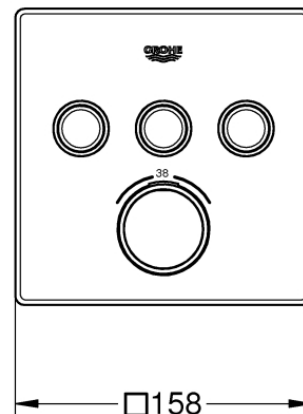

Flow Chart

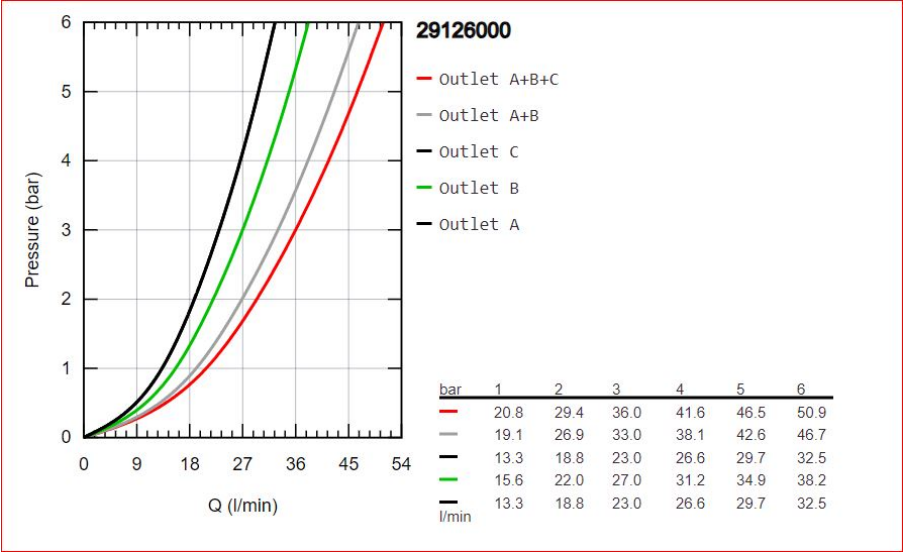

MOT



20 Year Warranty



GROHE TurboStat



GROHE Long-Life
finish