
Grohe Rapid SL Element for WC, 1.13 m installation height

Range:	Rapid SL
Description:	GROHE Rapid SL installation system – swift to fit with a low-noise flush and water-saving feature - with flushing cistern GD 2 , 6 l - 9 l, for on-the-wall installations or studded walls, powder coated steel frame, self-supporting, TÜV approved, 2 WC fixing bolts, fixing device for ceramic, WC ceramics with small bearing area (< 205 mm) require , additional accessory 38 779 000, distance of fixing bolts 180/230 mm, outlet bend Ø 90 mm, depth adjustable, reducer Ø 90/110 mm, inlet and outlet connecting set, flushing cistern GD 2, 6 - 9 l, containing following features:, water supply from left/right or back, Insulated against condensation, ½" water supply connection including integrated , angle valve and push fit flexible hose union, for on-the-wall installation please order wall brackets 38 558 00M (sold separately), for mounting of small flush plates please order , revision shaft 40 911 000 (sold separately)
Product Code:	G-38528001
ERP Code:	G-38528001
Barcode:	4005176863943
Product Features:	10 Year Warranty
Dimensions:	(l) 1170mm x (w) 520mm x (h) 150mm
Package Weight:	12
CAD3D:	Download

Product Images



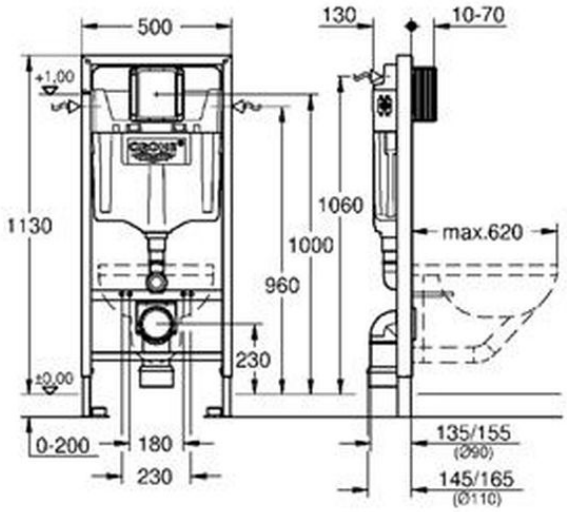

MOT

10 Year Warranty