
Grohe Uniset Element for WC with EPS housing

Range:	Uniset
Description:	with flushing cistern GD 2 , 6 l - 9 l, sound-insulating EPS module for , masonry-in, 830 x 480 x 130 mm, rail adaptors for modular fixing, for single or series installation, wall rail with fixing accessories for , single installation, 2 WC fixing bolts, distance of fixing bolts 180/230 mm, fixing device for ceramic, outlet bend Ø 90 mm, depth adjustable, reducer Ø 90/110 mm, inlet and outlet connecting set, flushing cistern GD 2, 6 - 9 l, containing following features:, factory set 6 l and 3 l, pneumatic discharge valve offering 2 modes of , operation: dual flush or single flush, connection from left/right/back or top, low noise (group I acc. to, German Noise Specification), Insulated against condensation, ½" water supply connection including integrated , angle valve and push fit flexible hose union, inspection shaft for vertical or horizontal use, allows for flush plate to be installed vertically or horizontally., no tools required for the installation , of the inspection shaft incl. protection , during construction phase, preparation for shower toilets with additional accessory 40 899 000 (sold separately), for mounting of small flush plates please order , revision shaft 40 911 000 (sold separately)
Product Code:	G-38643001
ERP Code:	G-38643001
Barcode:	4005176865411
Product Features:	10 Year Warranty, JaswicApproved
Dimensions:	(l) 1125mm x (w) 506mm x (h) 145mm
Package Weight:	7
CAD3D:	Download

Product Images



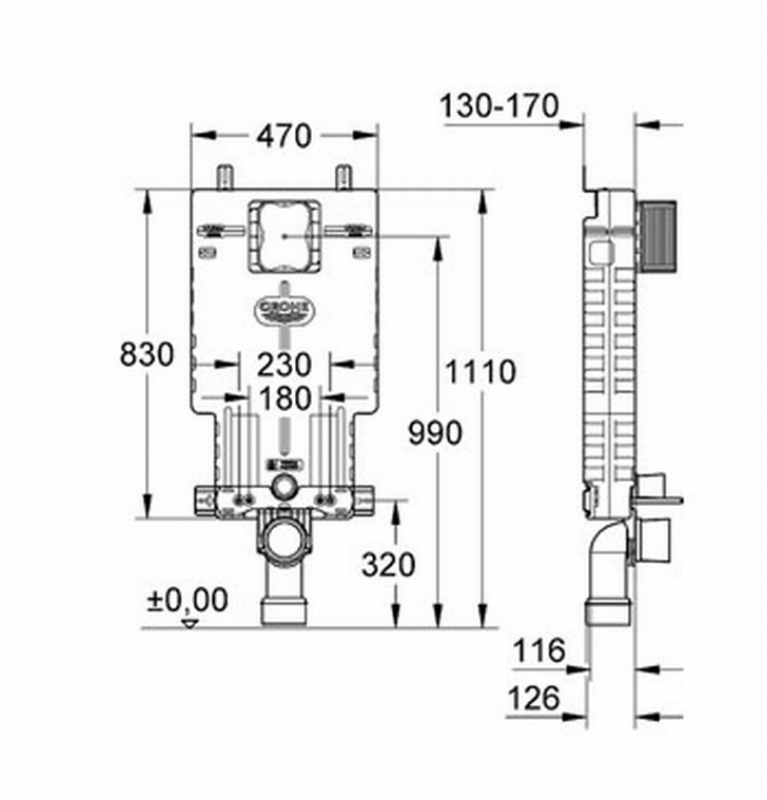

MOT

10 Year Warranty

JaswicApproved