Cobra Cobra Float Valve

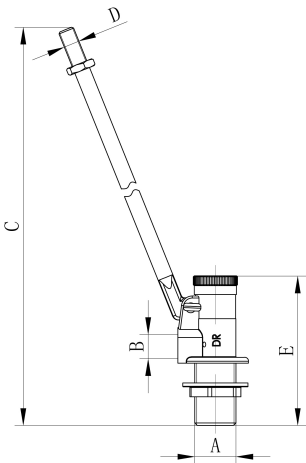|	
Range:	Cobra
Description:	Float valve with side inlet, rough brass. Includes: high-pressure MOH pattern, 520mm long arm, piston, backnut, 16mm I.D. stainless steel seat, 50mm long inlet, and 2 male inlet.
Product Code:	700-50/N
ERP Code:	FFLOHI50-7FT01
Barcode:	6002194052159
Product Features:	2 Year Warranty
Dimensions:	(l) 690mm x (w) 90mm x (h) 90mm
Package Weight:	2.18
CAD3D:	Download

Product Images

product-code	ERP code	A	B	C	D	E
700-15/N	FFLOHI15-7FT01	1/2	9/16-26TPI	345.5	M8	78.5
700-20/N	FFLOHI20-7FT01	3/4	1/2	421	M8	104
700-25/N	FFLOHI25-7FT01	1	1.062x26PTI	515	M10	119
700-32/N	FFLOHI32-7FT01	1 1/4	1	530	M12	162
700-40/N	FFLOHI40-7FT01	1 1/2	1	562	M12	162
700-50/N	FFLOHI50-7FT01	2	1	649	M12	162

Flow Chart

COBRA FLOAT VALVES

Sales Item	Size	Orifice Ø mm	Float Ø mm	Closing Pressure (kPa) 1/2V	3/4V	Arm Length	Total Length w/o Float	w Float	Min tank depth from inlet centre	SABS min flow @100 kPa	@200 kPa	Actual Flow	50	100	200	300	400	500	600	800	1000	1200	1400	1600	1800	2000
MOH HP 700 - 2000 kPa	15 mm	2.7 ±0.1	110	3800	4900	286	314	436	281	5		6.5	2.7	3.9	5.5	6.7	7.4	8.7	9.5	11	12.3	13.5	14.5	15.5	16.5	17.3
	20 mm	4.5 +0.15	125	2400	3100	319	379.4	516.4	318	20		17.8														
	25 mm	10	205	2700	3900	400	467.5	672.5	425	35		91.4	35	49	70	85	99	110	121	140	156	171	185	198	210	221
	32 mm	11.1 ±0.1	205	1900	2300	430	518.5	723.5	457	80		116	43	61	86	106	122	136	149	173	193	211	228	244	259	273
	40 mm	14.3 ±0.1	254	2300	3400	430	518.5	772.5	498	90		173	72	101	143	175	202	226	248	286	320	350	378	405	430	453
	50 mm	16 ±0.1	254	2100	3100	520	608.5	862.5	556	100		210	90	127	179	220	253	283	310	358	401	439	474	507	538	567
MOH LP 710 - 600 kPa	15 mm Special	4.5 ±0.1	110	2200	3200	286	436	436	318																	
	15 mm	3.2 ±0.1	110	3000	4000	286	314	518.6	281																	
	20 mm	10	125	700	900	319	381.6	672.5	425																	
	25 mm	13	205	2100	2800	400	467.5	693.5	425																	
	32 mm	22.2 ±0.1	205	350	550	430	518.5	723.5	457																	
	40 mm	27 ±0.1	245	900	1500	430	608.5	813.5	498																	
	50 mm	27 ±0.1	254	1050	1700	520	608.5	862.5	556																	
1212 715 HP	15 mm	2.5 ±0.1	110	3600	4600	286	336.6	458.6	318	5		5.5														
	20 mm	6.35 -0.4	125	1000	1800	319	412.5	549.5	281	20		37														
1212 720 LP	15 mm	4.5 +0.15	110	1800	2600	319	412.5	549.5	281	20	11.5	86														
	20 mm	10	125	600	1000		412.5	549.5																		

MOT

2 Year Warranty