



Grohe Grohtherm SmartControl Thermostat for concealed installation with 3 valves

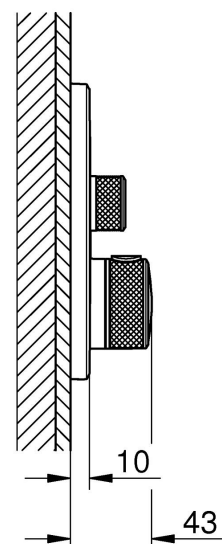


Range:	Grohtherm SmartControl
Description:	Grohtherm SmartControl thermostat for concealed installation – three valves offer you choice and flexibility for your ultimate shower and bath experience - set for final installation for, GROHE Rapido SmartBox 35 600/35 604, metal wall escutcheon with GROHE FastFixation (covered escutcheon, and shaft sealing, covered fixing), retroactively 6° adjustable, GROHE Long-Life finish, GROHE SmartControl push for ON-OFF, turn for volume adjustment from GROHE Water Saving to Full Flow, exchangeable symbols, GROHE TurboStat compact cartridge with wax thermoelement, GROHE SafeStop safety button at 38°C, (calibration required), GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included, built-in non return valve , and dirt strainers, multiple outlets can be run simultaneously, without roughing-in-set, flow performance: , outlet A = 23 l/min , outlet B = 27 l/min , outlet C = 23 l/min, outlet A + B = 33 l/min, outlet A + B + C = 36 l/min
Product Code:	G-29121AL0
ERP Code:	G-29121AL0
Barcode:	4005176455100
Product Features:	GROHE TurboStat, 20 Year Warranty, GROHE Long-Life finish, 10 Years on coating
Dimensions:	(l) 200mm x (w) 180mm x (h) 243mm
Package Weight:	1.6
CAD3D:	Download

Product Images

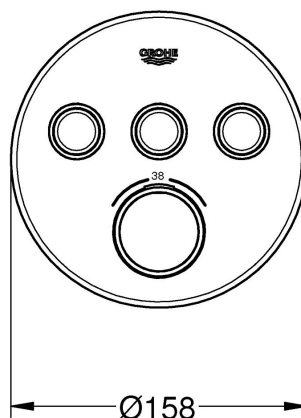

Flow Chart

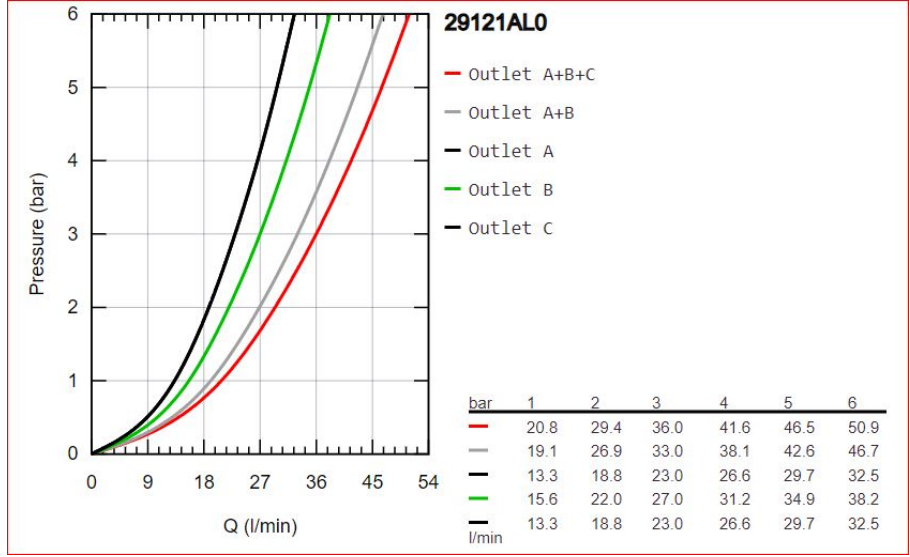

MOT



20 Year Warranty



GROHE TurboStat



GROHE Long-Life
finish