

Grohe Grohtherm SmartControl SmartControlThermostat for concealed installation with 2 valves

Range: Grohtherm SmartControl

Description: Bring ease and precision into your bath and shower with the Grohtherm SmartControl thermostat - set for final installation for, GROHE Rapido SmartBox 35 600/35 604, metal wall escutcheon with GROHE FastFixation (covered escutcheon, and shaft sealing, covered fixing), retroactively 6° adjustable, GROHE Long-Life finish, GROHE SmartControl push for ON-OFF, turn for volume adjustment from GROHE Water Saving to Full Flow, exchangeable symbols, GROHE TurboStat compact cartridge with wax thermoelement, GROHE SafeStop safety button at 38°C, (calibration required), GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included, built-in non return valve , and dirt strainers, multiple outlets can be run simultaneously, without roughing-in-set, flow performance: , outlet B = 24 l/min , outlet C = 26 l/min, outlet B+C = 29 l/min

Product Code: G-29124AL0

ERP Code: G-29124AL0

Barcode: 4005176558146

Product Features: GROHE TurboStat, 20 Year Warranty, GROHE Long-Life finish, GROHE Water Saving, 10 Years on coating



Dimensions: (l) 200mm x (w) 180mm x (h) 243mm

Package Weight: 1.955


CAD3D: [Download](#)



Product Images

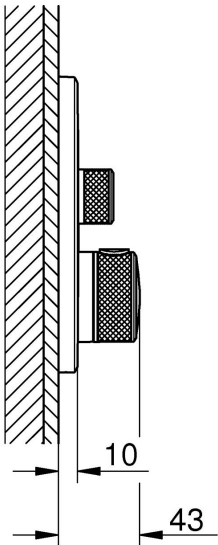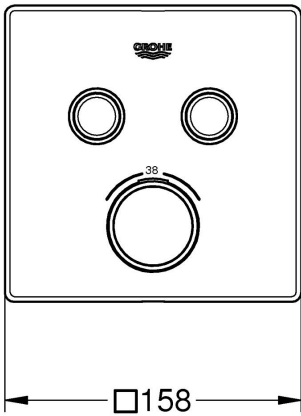

Flow Chart

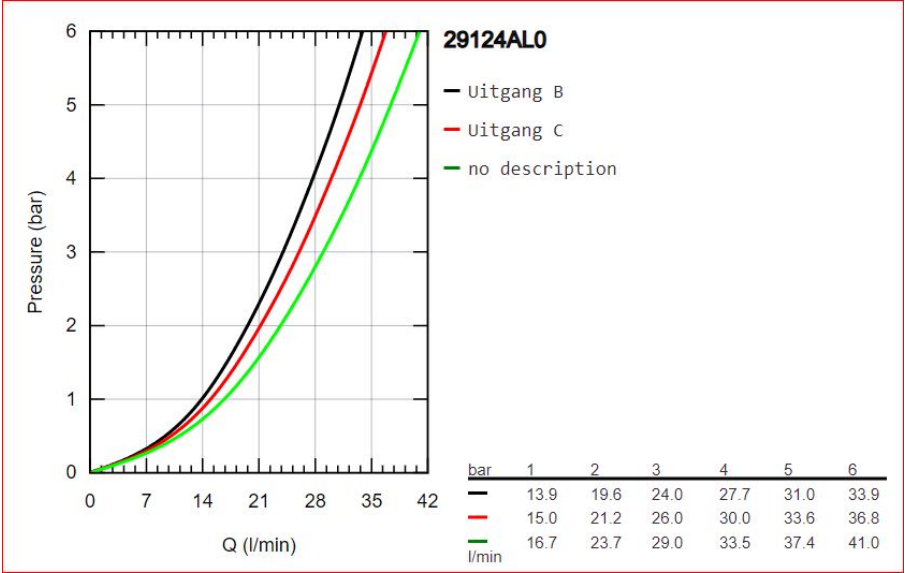

MOT



GROHE TurboStat



GROHE Long-Life
finish



GROHE Water Saving



20 Year Warranty