
Grohe Grohtherm SmartControl Thermostat for concealed installation with 3 valves


Range:	Grohtherm SmartControl
Description:	For a chic cosmopolitan look and perfect precision choose the Grohtherm SmartControl concealed thermostat - set for final installation for, GROHE Rapido SmartBox 35 600/35 604, metal wall escutcheon with GROHE FastFixation (covered escutcheon, and shaft sealing, covered fixing), retroactively 6° adjustable, GROHE Long-Life finish, GROHE SmartControl push for ON-OFF, turn for volume adjustment from GROHE Water Saving to Full Flow, exchangeable symbols, GROHE TurboStat compact cartridge with wax thermoelement, GROHE ProGrip with knurl structure, GROHE SafeStop safety button at 38°C, (calibration required), GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included, built-in non return valve , and dirt strainers, multiple outlets can be run simultaneously, without roughing-in-set, flow performance: , outlet A = 23 l/min , outlet B = 27 l/min , outlet C = 23 l/min, outlet A + B = 33 l/min, outlet A + B + C = 36 l/min
Product Code:	G-29126000
ERP Code:	G-29126000
Barcode:	4005176413322
Product Features:	GROHE TurboStat, 20 Year Warranty, GROHE Long-Life finish
Dimensions:	(l) 200mm x (w) 180mm x (h) 243mm
Package Weight:	1
CAD3D:	Download

Product Images



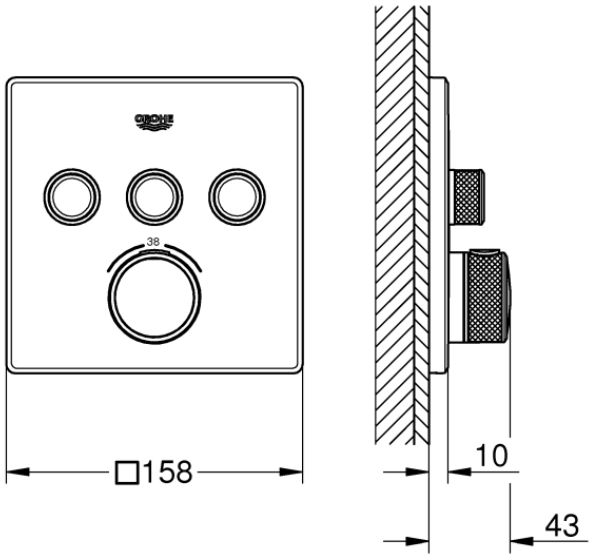

Flow Chart

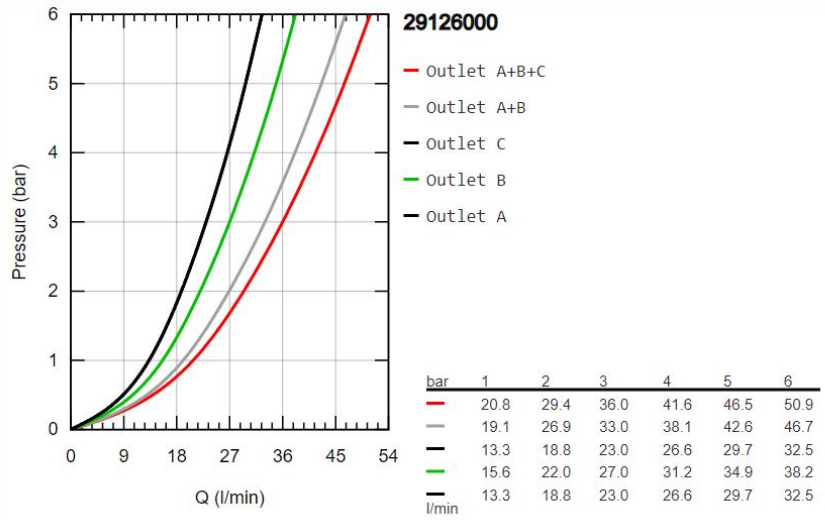

bar	1	2	3	4	5	6
—	20.8	29.4	36.0	41.6	46.5	50.9
—	19.1	26.9	33.0	38.1	42.6	46.7
—	13.3	18.8	23.0	26.6	29.7	32.5
—	15.6	22.0	27.0	31.2	34.9	38.2
—	13.3	18.8	23.0	26.6	29.7	32.5
l/min						

MOT

20 Year Warranty

GROHE TurboStat

GROHE Long-Life finish